

S p e c i f i c a t i o n


1. Model
LED Display Lights LTA1 series

Usage	Product number	Color temperature
900mm length wood/glass shelf	LTA1-09AWH-01	white(4200K)
1200mm length wood/glass shelf	LTA1-12AWH-01	white(4200K)

Remark: The optional hook for glass shelf is necessary for the glass shelf.

Moreover under the edge shape of the glass shelf, only L character type bracket is suitable.

2. Coverage: Specifications provide for LED Display Lights LTA1 series.
3. Structure & Dimension (1200mm wood/glass shelf usage)
 (1) Outward: W40, D15.5, L846(1131) mm
 (2) Pitch for installation: 817(1103) mm
 (3) Case material: Aluminum (Anodized aluminum clear finish)
 (4) Weight: Approx.530 (700) g
 (5) LED light: chip type LED manufactured in Japan
 (6) Series connection: max 3.6 m
 (7) Installation: Attached screw or optional hook for the glass
4. Electric property (1200mm wood/glass shelf usage)
 (1) Supply voltage: DC 24V
 (2) Input current: 0.67(0.89)A
 (3) Power consumption (real): 16(22)W
 (4) Luminous Flux : 620(825) lumen
 (5) LED Beam Angle 2θ,1/2 : approx 110 degree.
5. Operating conditions
 (1) Surrounding temperature: -10 degree to +40 degree
 (2) Using environment: indoor only (95% in humidity), non dew
6. Accessory : 2 pcs of screw, 3 pcs of double faced tape for temporary installation, manual(A4 2 pcs)
7. Packing: 1 pc in 1 box
8. Notes
 (1) Please handle it correctly according to the manual.
 (2) This product is for the lighting under the shelf or indoor use.
 (It is not possible to use for the water surroundings and freezing and the refrigeration case, etc.)
 (3) Please use the power supply within 80% of the declared power.
 (4) Optional materials (power supply, extension code, power supply code and bracket hook) are required for use.
 (5) It can not dimmer and modulate in lighting.
9. Outlook & Dimension

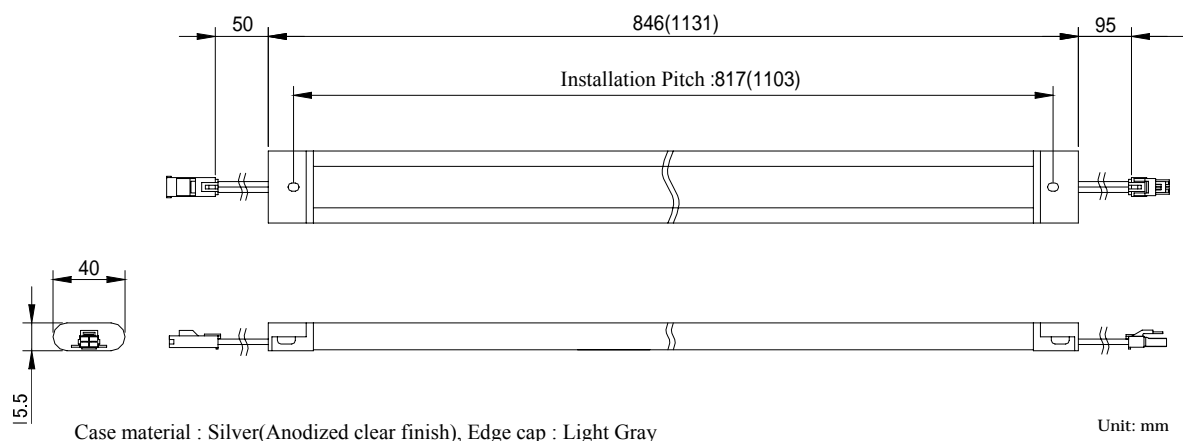

Please note that the content described here might be changed without a previous notice while developing beforehand.